



# Three Phase String Inverter

SUN- 60 / 70 / 75 / 80 K-G

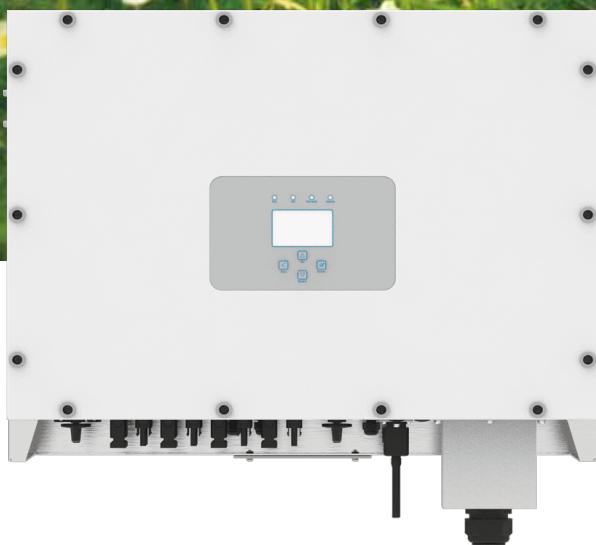

4 MPP tracker, Max. efficiency up to 98.7%

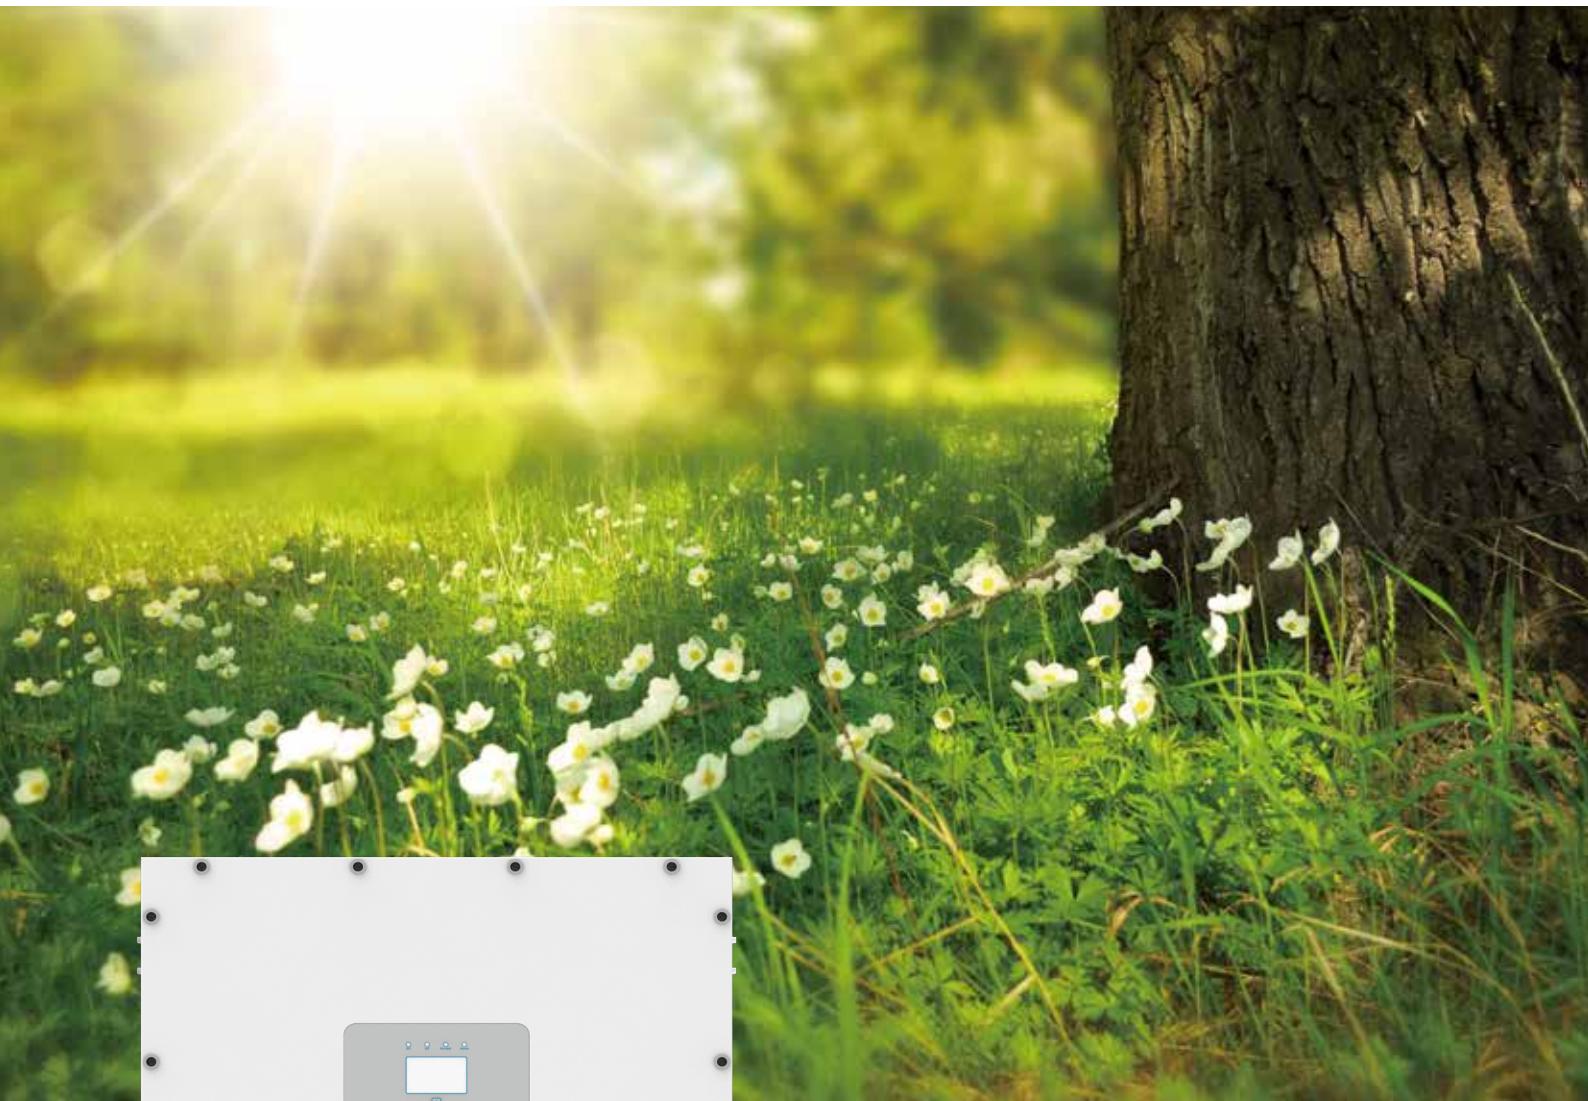

Zero export application, VSG application



String intelligent monitoring (optional)



Wide output voltage range



Type II DC/AC SPD



Anti-PID function (Optional)

Model	SUN-60K-G	SUN-70K-G	SUN-75K-G	SUN-80K-G
<b>Input Side</b>				
Max. DC Input Power (kW)	78	91	97.5	104
Max. DC Input Voltage (V)		1000		
Start-up DC Input Voltage (V)		250		
MPPT Operating Range (V)		200~850		
Max. DC Input Current (A)		40+40+40+40		
Max. Short Circuit Current (A)		60+60+60+60		
Number of MPPT / Strings per MPPT	4 / 3	4 / 4	4 / 4	4 / 4
<b>Output Side</b>				
Rated Output Power (kW)	60	70	75	80
Max. Active Power (kW)	66	77	82.5	88
Rated AC Grid Voltage (V)		220 / 380, 230 / 400		
AC Grid Voltage Range (V)		277Vac~460Vac (this may vary with grid standards)		
Rated Grid Frequency (Hz)		50 / 60 (Optional)		
Operating Phase		Three phase		
Rated AC Grid Output Current (A)	87.8	101.5	108.7	115.9
Max. AC Output Current (A)	95.7	111.6	119.6	127.5
Output Power Factor		0.8 leading to 0.8 lagging		
Grid Current THD		<3%		
DC Injection Current (mA)		<0.5%		
Grid Frequency Range		47~52 or 57~62 (Optional)		
<b>Efficiency</b>				
Max. Efficiency		98.7%		
Euro Efficiency		98.3%		
MPPT Efficiency		>99%		
<b>Protection</b>				
DC Reverse-Polarity Protection		Yes		
AC Short Circuit Protection		Yes		
AC Output Overcurrent Protection		Yes		
Output Overvoltage Protection		Yes		
Insulation Resistance Protection		Yes		
Ground Fault Monitoring		Yes		
Anti-islanding Protection		Yes		
Temperature Protection		Yes		
Integrated DC Switch		Yes		
Remote software upload		Yes		
Remote change of operating parameters		Yes		
Surge protection		DC Type II / AC Type II		
<b>General Data</b>				
Size (mm)		700Wx575Hx297D		
Weight (kg)		60		
Topology		Transformerless		
Internal Consumption		<1W (Night)		
Running Temperature		-25~65°C		
Ingress Protection		IP65		
Noise Emission (Typical)		<55 dB		
Cooling Concept		Smart cooling		
Max. Operating Altitude Without Derating		2000m		
Designed Lifetime		>20 years		
Grid Connection Standard		IEC61727, IEC62116, IEC60068, IEC61683		
Operating Surroundings Humidity		0~100%		
Safety EMC / Standard		IEC62109-1/-2, IEC61000-6-2, IEC61000-6-4, IEC61000-3-11, IEC61000-3-12		
<b>Features</b>				
DC Connection		MC-4 mateable		
AC Connection		IP65 rated plug		
Display		LCD 240 x 160		
Interface		RS485/RS232/Wifi/LAN		